# Linear Compact Fluorescent Wall

1.4



#### **GENERAL PRODUCT INFORMATION:**




This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for damp locations.


CAUTION - RISK OF FIRE This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWER TO THE ELECTRICAL BOX.

## Install the Fixture

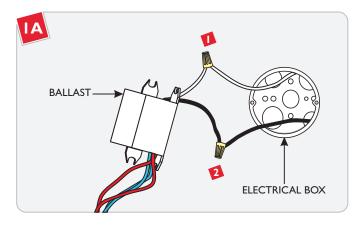

Connect the white ballast wire to the neutral power line wire with a wire nut.


Connect the black ballast wire to the hot power line wire with a wire nut.

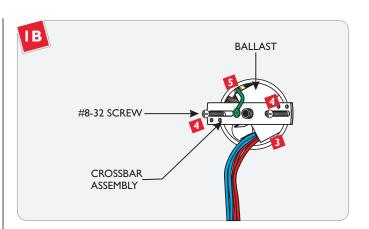

- 9 Place the ballast inside the electrical box.
- Mount the crossbar assembly to the electrical box holes with the two #8-32 screws provided.
- S Connect the crossbar to a suitable ground in accordance with local electrical codes.






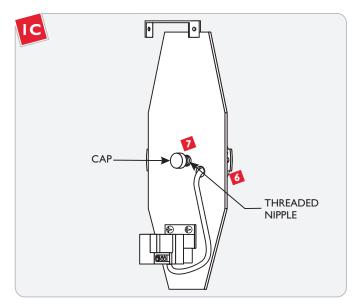


- 6 Place all wires and wire nut connections properly inside the electrical box.
- Slide the mounting plate center hole onto the exposed threaded nipple. Secure the mounting plate in place by tightening the cap to threaded nipple.

### Install the Lamp & Shade

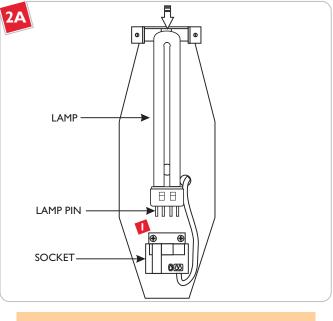

- Use MAX 13 Watt Twin Tube 2GX7 Base Compact Fluorescent Lamp.
- Push the lamp pins completely into the socket holes.

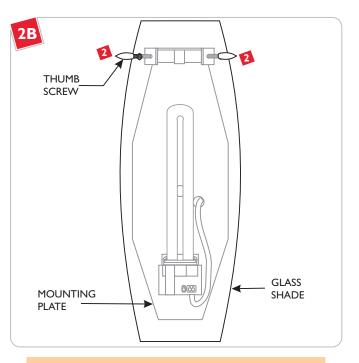

**SAVETHESE INSTRUCTIONS!** 



7400 Linder Ave, Skokie, IL 60077 800.323.3226 - 847.626.6300

#### www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company **NOTE:** Do not over tighten the thumb screws. Overtightening may break the glass and result in injury.

Place the glass shade onto the mounting plate. Align the glass shade holes with the mounting plate holes and tighten (Do Not Over Tighten) the thumb screws to secure the glass shade in place.