

# Mojave (Compact Fluorescent)

PW483\_18GU 1.1




Wall

## GENERAL PRODUCT INFORMATION:


This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

This product is suitable for damp locations.

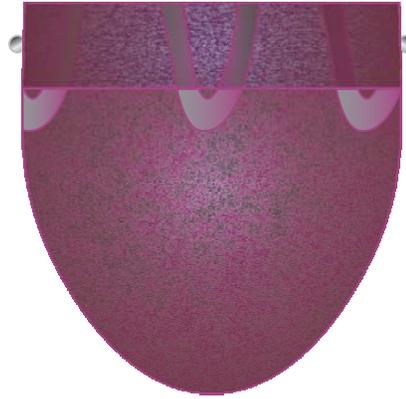


**CAUTION - RISK OF FIRE**  
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **DISCONNECT POWER TO THE ELECTRICAL BOX.**

## Install the Fixture

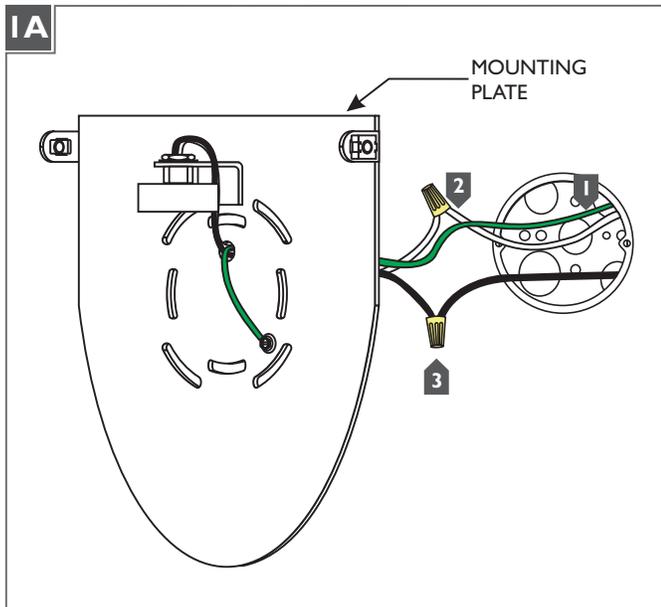


- 1** In accordance with local electrical codes, make sure that the mounting plate is grounded.
- 2** Connect the fixture white wire to the neutral power line wire with a wire nut.
- 3** Connect the fixture black wire to the hot power line wire with a wire nut.

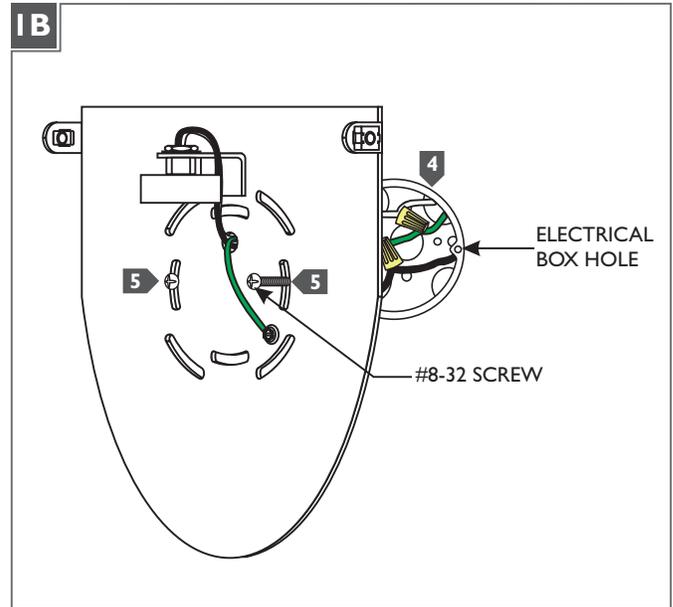

- 4** Place all wires and wire nut connections properly inside the electrical box.
- 5** Align the mounting plate holes with electrical box holes and tighten with two #8-32 screws to secure the fixture in place.

## Install the Lamp & Shade

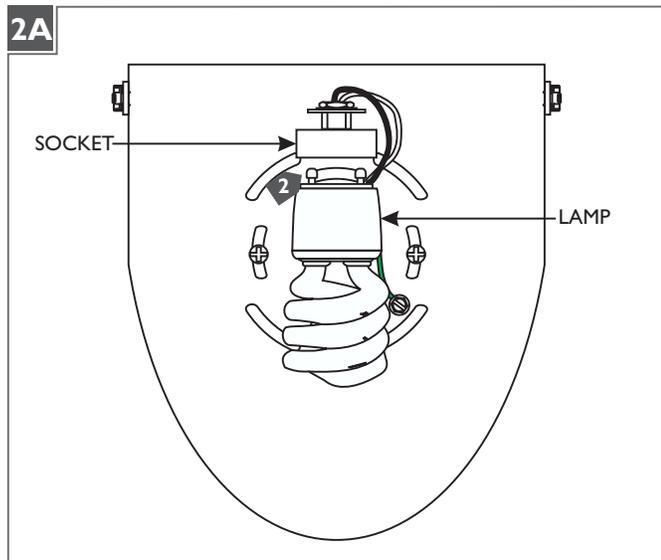


**CAUTION:** To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture by turning the wall switch off.


Use **MAX** 120 Volt, **13 Watt** Type GU24 Base Self Ballasted Spiral Compact Fluorescent Lamp.



- 1 Push the lamp pins into the large portion of the socket slots and rotate it to lock it in place.

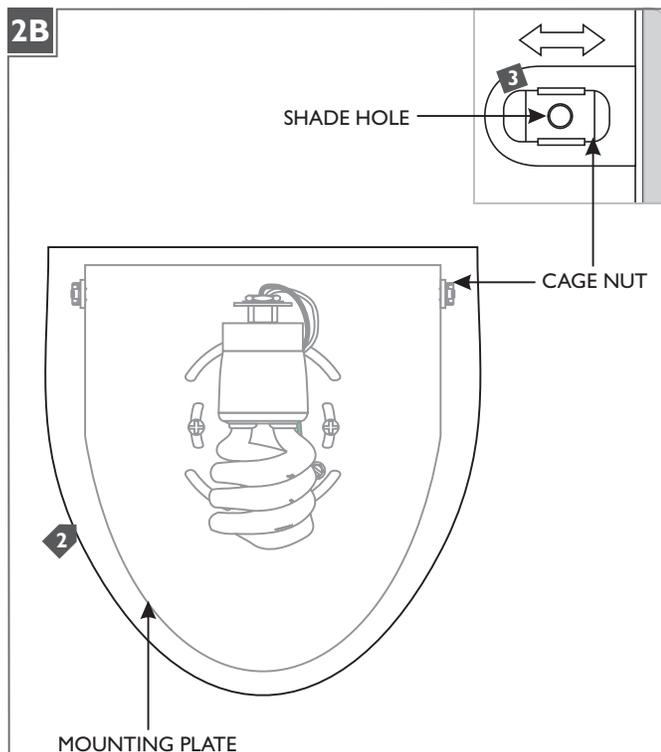

- 2 Place the glass shade over the mounting plate against the wall.
- 3 Slide the cage nuts to align them with the holes in the shade.

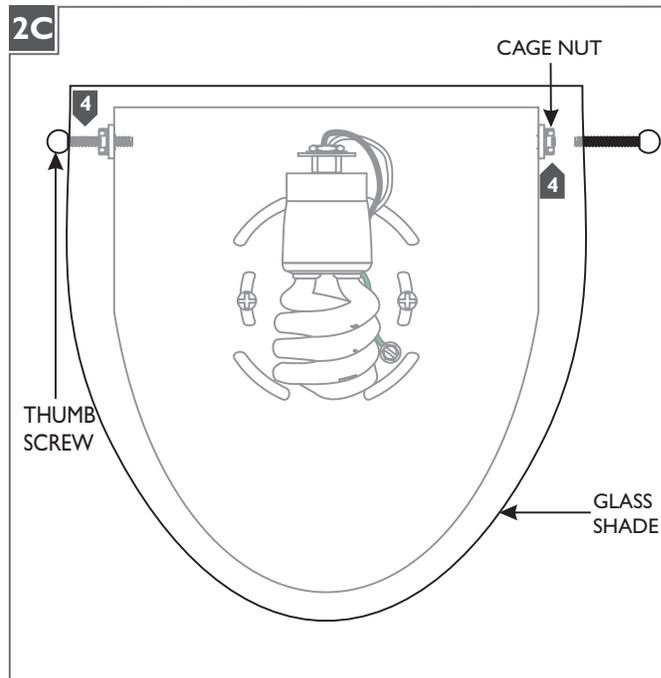

- 4 Tighten the thumb screws through the glass shade holes into the cage nut holes.

**NOTE:** Do not over tighten the thumb screws. Overtightening may break the glass and result in injury.

## SAVE THESE INSTRUCTIONS!

### Statement of Warranty

LBL Lighting warrants all products manufactured to be free from defects in material and workmanship under normal use for 3 years after the date of original purchase. This warranty only applies when components, including power supplies, have been provided by LBL Lighting.

Upon confirmation of a defect or failure, at our discretion we will repair or replace the item or will refund your purchase price if repair or replacement is not possible or practical. Our warranty covers only the product itself; we will assume no liability for labor costs, installation costs, or other losses.

**LBL**

7400 Linder Ave, Skokie, IL 60077  
800.323.3226 - 847.626.6300

[www.lblighting.com](http://www.lblighting.com)

© 2012 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company