



POWER BRIGHT
YOUR LEADER IN POWER SOLUTIONS

MODEL
XR400-12

SPECIFICATION SHEET

12V DC to AC 400 Watt Power Inverter



This inverter plugs into your cigarette lighter or directly to a 12 Volt DC battery to power laptops, cell phone chargers and other small electronic devices in your vehicle!

Features:

- 400 watts continuous power
- 800 watts peak power
- Provides 3.3 Amps
- Overload Indicator
- USB Output Port
- Power ON/OFF Button

**CARBON
FIBER
DESIGN**


**MICRO
CHIP
TECHNOLOGY**

**USB
CONNECTION**

Output Wave Form	Modified Sinewave
Continuous AC Output Power	400W
Peak Power	800W
Input	12.5V DC, 40A Max
Output	120VAC / 60Hz
USB Output Power	5V DC 250 mA
Input voltage range	10-15 VDC
Over voltage shutdown	over 15 VDC
Under voltage shutdown	under 10 VDC
Low voltage alarm	Audible at 10.6 VDC
AC receptacle	Two 3-Prong
Warranty	2 year
Inverter weight	1.3 lbs
Dimensions (W x H x D)	6.4 x 2.5 x 4.3 in.

Accessories Included:

- Battery Clip Cables
- Cigarette Lighter Connector

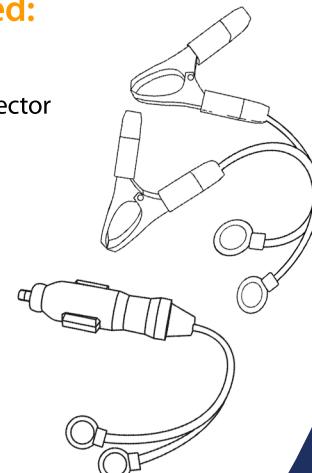

Product Box



MODEL
XR400-12
SPECIFICATION SHEET

www.PowerBright.com
Toll free : 1-866-295-6775
© 2010 PowerBright . All Rights Reserved