



SPECIFICATION GUIDE

ITEM # **PS 7 IC NSP** NEW _____ REVISION _____

(NO SOCKET PLATE*)

ITEM DESCRIPTION: **6" UNIVERSAL TYPE-IC
RECESSED HOUSING**

INDIVIDUAL PACK DIMENSIONS:

L x W x D: 25 X 16 X 15 1/2
 WEIGHT: _____
 CUBIC FT.: 0.45
 STD.PK.: 8

MASTER PACK DIMENSIONS:

L x W x D: _____
 WEIGHT: _____
 CUBIC FT.: _____
 STD.PK.: _____

PRODUCT DIMENSIONS:


DEPTH: <u>7 1/2</u>	SWITCH: <u>NO</u>
WIDTH: <u>6 1/2</u>	TYPE OF SW.: <u>--</u>
LENGTH: <u>11 1/2</u>	CONV. OUTLET: <u>NO</u>
EXT. FROM WALL: _____	KNOCKOUTS: <u>YES</u>
HT. CNTR OF OUTLET BOX: _____	TYPE OF K.O.: <u>(5) CONDUIT</u>
CHAIN LENGTH: _____	<u>(4) ROMEX</u>
WIRE LEAD LENGTH: <u>6 (min)</u>	

LAMPS:

QUANTITY: 1
 TYPE: MEDIUM BASE
 MAX WATT: 90 (SEE TRIM CORRELATION)
 RECOMMENDED LAMP: BR, R, PAR, A (SEE TRIM CORRELATION)

PRODUCT CONSTRUCTION:

METAL PARTS	MATERIAL	FINISH
WRAP	ALUM.	NONE
PLASTER FRAME, J-BOX	GALV. STEEL	NONE
BAR HANGERS	GALV. STEEL	NONE

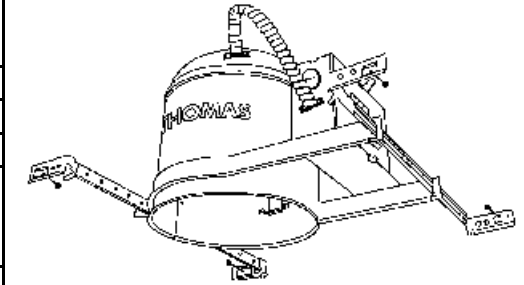

U.P.C.
0 20389 15799 7

FEATURES & BENEFITS

INTERLOCKING BAR HANGERS ADJUST FOR JOIST CENTERS FROM 16" TO 24".
 BAR HANGERS INCLUDE PRE-POSITIONED NAILS FOR FAST, SECURE MOUNTING.
 ALSO SUITABLE FOR T-GRID CEILINGS.

GLASS PARTS	TYPE OF GLASS	FINISH	FITTER SIZE	REPLCMNT GLASS

* NSP VERSION IS SHIPPED WITHOUT A SOCKET PLATE FOR USE EXCLUSIVELY WITH TRB-STYLE ENCLOSED TRIMS.

OTHER PARTS	MATERIAL
SOCKET	PORCELAIN w/ NICKEL PLATED COPPER
	SCREW SHELL

JUNCTION BOX INCLUDES INTEGRAL ROMEX STRAIN RELIEF. DOOR IS HINGED TO PREVENT ACCIDENTAL LOSS.

NOTES

FOR USE ONLY WITH FULLY ENCLOSED, EYEBALL OR IC SHOWER TRIMS.*
 THERMALLY PROTECTED. UL LISTED FOR USE IN DIRECT CONTACT WITH THERMAL INSULATION.
 UL LISTED FOR DAMP LOCATIONS AND THROUGH BRANCH CIRCUIT WIRING.

INCLUDES DETAILED INSTRUCTION SHEET AND PLASTER SHIELD TO PROTECT INSIDE OF HOUSING DURING PAINTING.