


CATALOG NUMBER	TYPE
PROJECT	

8" CFL DOWNLIGHT **MODEL R8VF-S**

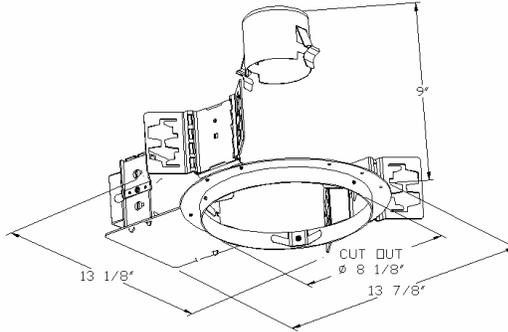

Ordering Matrix	
Model	Trim
R8VF-S	
<i>R= Recessed 8=8 inch V=Vertical F=Fluorescent S=Single Lamp</i>	<i>See page two for selection</i>

Ordering Example (model – series + trim) : R8VF-S + trim number

Product Details	Specification Features
<p>Description: Eight-inch downlight rated for use with one 26 or 32 or 42w compact fluorescent lamp.</p> <p>Materials: Frame and junction box is 20 gauge steel.</p> <p>J-Box: Electrical component is a G24q base 600V PBT socket, high temp rated. Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch wiring.</p> <p>Ballast: High Power Factor solid state ballast suitable input voltage ranging from 120-277v. Ballasts provide automatic termination upon end or lamp life. Outboard mounted to reduce transfer and maintain lamp efficacy and life.</p> <p>Lamping: Accepts G24q base CFL lamps, Exact wattage and lamp choice dependant on trim selection. Lamps are sold separately.</p> <p>Ratings: Non-IC rated. Insulation must be kept at least 3" away from the housing. U.L. and C.U.L. listed. Suitable for damp locations.</p> <p>Mounting: Install mounting frame using adjustable mounting bracket to mounting bar. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.</p>	<ul style="list-style-type: none"> • Provided with Push-in wire connector for easy installation. • Junction box is accessible from below the ceiling. Spring loaded door for easy access to wiring. • Socket cup snaps onto reflector neck to assure consistently correct optical alignment without tools. • 5 year WAC Lighting product warranty.

WAC Lighting reserves the right to modify the design of our products as part of the company's continuous improvement program.

CATALOG NUMBER	TYPE
PROJECT	

8" CFL DOWNLIGHT **MODEL R8VF-S**

Compatible Trims (Sold separately) :

<p>R8VT-01-□□/WT Reflector Finish: SC Flange Finish: WT</p> <p>Lamping: 1X26W PL-C 1X26W PL-T 1X32W PL-T 1X42W- PL-T</p>		<p>R8VT-02-□□/WT Reflector Finish: WT,BK Flange Finish: WT</p> <p>Lamping: 1X26W PL-C 1X26W PL-T 1X32W PL-T 1X42W- PL-T</p>	
<p>R8VT-03-□□/WT Reflector Finish: SC,WT Flange Finish: WT</p> <p>Lamping: 1X26W PL-C 1X26W PL-T 1X32W PL-T 1X42W- PL-T</p>			

Finish Key:
BK = Black, SC = Specular Clear, WT = White

Notes:
The full catalog number for a complete downlight includes the model numbers for both the trim and the housing.
Additional information regarding each individual trim can be viewed on the individual trim spec sheets.