American Standard

MAYBROOK URINAL

- Vitreous china
- Low-consumption (3.8 Lpf/1.0 gpf)
- Flushing rim
- Washout flush action
- Integral strainer
- 3/4" inlet spud
- Outlet spud with 1-1/2" tubing tailpiece
- Wall hanger
- Fixture only
- Meets ANSI flush requirements at 0.7 to 1.0 GPF

G581.015 Top spud

Nominal Dimensions: 324 x 324 x 457mm (12-3/4" x 12-3/4" x 18")

Recommended working pressure - between 20 psi at valve when flushing and 80 psi static.

Compliance Certifications -

 Meets or Exceeds the Following Specifications:
ASME A112.19.2 for Vitreous China Fixtures includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions



□ Color: □ White □ Bone □ Silver


Shell Black

- □ Flush Valve: Sloan Royal 186-1
- Alternative Flush Valve:
- □ "P" Trap:



MAYBROOK[™]

URINAL VITREOUS CHINA

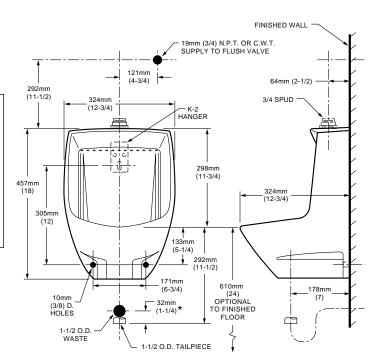

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF "P" TRAP IS SUGGESTED. "P" TRAP AND FLUSH VALVE NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.