


Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.

This light should be installed by a licensed electrician

Assembly & Installation Instructions

1. Shut off power to outlet box (Fig A).
2. Insert G9 xenon bulbs in sockets.
3. Screw barrier glasses to sockets until tight.
4. Slide glass shade over backplate and secure it with threaded stems, plastic washers, and nuts.
5. Attach glass holders to holder block, tighten with allen screws using allen wrench (included).
6. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
7. Place mounting plate over outlet box and secure it with outlet box screws. Use mounting screws and anchors for extra support.
8. Attach the backplate over the mounting plate and tighten with back plate screws.
9. Restore power to fixture.

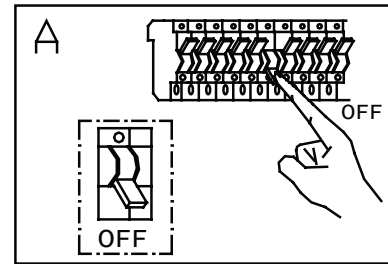

CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.

Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

