

NEWAGE STEEL WELDED 1 DRAWER BASE CABINET INSTALL INSTRUCTIONS

NEWAGE
PRODUCTS INC.

KIT CONTAINS

- Height-Adjustable Steel Leveling Legs (4)
- NewAge Name Plate with Mounting Hardware (1)
- Aluminum Door Trim (5)
- 5/8" x 1/4" Zinc Plated Hex Bolt (4)
- 1/4" - 20 Hex Lock Nuts (4)
- 10mm Leveling Leg Mounting Bolts (8)
- Lock Washers (8)
- #10 x 7/8" Flat Pan Head Butcher Block Anchoring Wood Screws (4)
- Drawer Keys (2)
- Drawer Liners (1)

TOOLS REQUIRED

- 10mm wrench
- 7/16" wrench
- 7/16" socket driver wrench
- 12" Magnetic Level
- #2 Philips Bit
- Cordless Power Drill with 7/16" socket attachment
- Tape Measure



WARNING: EXCESSIVE WEIGHT HAZARD

Use two or more people to move, assemble or install cabinet or locker. Failure to do so can result in back or other injury

UNPACKING THE BASE CABINET:

- Begin by placing the cabinet on a sound level surface.
- Remove all cardboard and foam packaging material.
- Remove clear plastic bag.
- Dispose / recycle all packaging materials.
- Remove and verify all the contents in the box. See "Parts and Hardware Supplied List"

PRODUCT SPECS

SIZE: 34.5"H x 28"W x 24"D

WEIGHT CAPACITY: Drawer: 60lbs
Top & Bottom: 300lbs

NEWAGE
PRODUCTS INC.
THE ORGANIZED GARAGE

201 Chrislea Road, Vaughan, ON, Canada
1-877-306-8930
www.NEWAGEPRODUCTS.com

NEWAGE STEEL WELDED 1 DRAWER BASE CABINET INSTALL INSTRUCTIONS

NEWAGE
PRODUCTS INC.


ASSEMBLY INSTRUCTIONS:

INSTALL THE HEIGHT-ADJUSTABLE STEEL LEVELING LEGS:


1. Close / lock the cabinet doors.

NOTE: If you need to open the cabinet / locker doors during leveler assembly, open them slowly and do not put any weight on the open doors. This avoids damage to the cabinets hinges.

2. Using two or more people, place the cabinet / locker on its back, using supplied packaging material to cushion the cabinet to prevent any scratching of the painted surfaces.
3. One at a time line up each height-adjustable leveling leg with the corner of the cabinet. The threaded holes in the base of the cabinet should align with the holes in the leveling leg.




4. Using a 10mm wrench, hand tighten the 10mm bolt with one lock washer into each of the pre-threaded holes.
NOTE: Bolts should be snug. Do not over tighten or force bolts. This may result in the damaging of the threads.
5. After the leg is securely mounted to the base of the cabinet, screw on the threaded leveler by hand. Thread the leveler 95% in. This will be adjusted later on in the install.
6. Repeat steps 3 – 5 for the remaining legs.



7. Using two or more people, stand up the base cabinet and place into desired location.

INSTALLING ALUMINUM DOOR TRIM:

1. Crimp the trim before sliding into place. Slide aluminum trim onto the inner lip of each cabinet door's grooved handle.

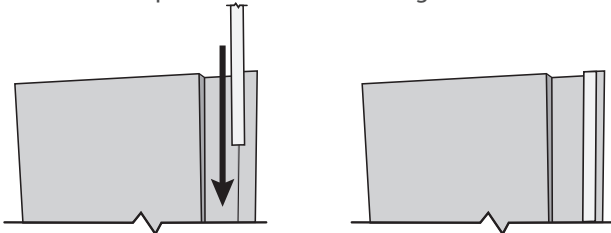


BASE CABINET LEVELING:

1. Place a small magnetic level onto the top of the base cabinet to verify the levelness of the cabinet.
2. If the floor slopes adjust the cabinets height-adjustable leveling legs up or down to bring the cabinet to a level position. This may require two people, one person to verify / bring cabinet level and one person to adjust the legs up and down simultaneously.
3. The base cabinet must be adjusted front to back and side to side.
4. Do not load up the base cabinet until the leveling process is complete.


FASTENING CABINETS TOGETHER:

NOTE: For ease of installation and to achieve a professionally installed look it is always better to fasten cabinets together using the supplied 5/8" x 1/4" zinc plated hex bolts and 1/4" - 20 hex lock nuts. Two people are required for this aspect of the installation.

1. Locate cabinet fastening holes on the sides of each cabinet. Two holes are top and bottom on the sides of each cabinet.

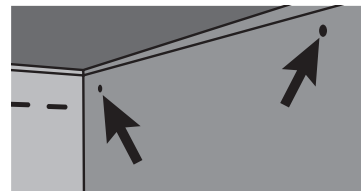


2. With your initial cabinet already securely mounted to the wall or level in place, put a 5/8" x 1/4" zinc plated hex bolt through the hole and into the same hole of the next cabinet you wish to install. Finish off the bolt by hand tightening on a 1/4" - 20 hex lock nut.

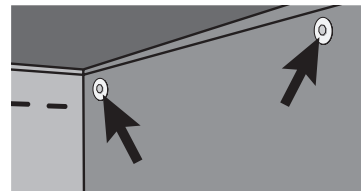

3. Repeat this step for the remaining holes.
4. Using a small magnetic level, level the second cabinet.
5. Once level using a 7/16" wrench and a 7/16" socket wrench tighten the nuts. Ensure both cabinet faces are flush prior to tightening of nuts.
5. Now you can mount the second cabinet directly into the wall.

MOUNTING OF THE BUTCHER BLOCK TOP (optional):

1. Place the butcher block top on top of both the base cabinet.
2. Align the butcher block top so that it is flush with the side of the base cabinet.
3. Using the supplied butcher block hardware fasten 4 - #10 x 7/8" flat pan head screws through the cabinet top into the butcher block top. A cordless power drill and a #2 Philips bit is required to drive the screws into the butcher block top.

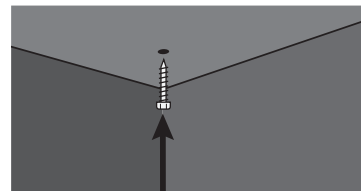

4. Put drawer back into base cabinet.

THANK YOU for purchasing a NewAge Product. Please give us a call, or visit us online if you have any other questions or comments.

NEWAGE PRODUCTS INC. WELDED-STEEL CABINETS WARRANTY 10 YEAR LIMITED MANUFACTURER WARRANTY



For ten years from the date of purchase, when this product is installed, operated and maintained according to the instructions attached to or furnished with the product, NewAge Products Inc. will replace the defective product or parts if the part fails as a result of defective materials or workmanship.

NEWAGE PRODUCTS INC. WILL NOT PAY FOR:

1. Service calls to correct the installation of any NewAge products or to instruct you how to use or install them.
 2. Damage resulting from improper handling or shipping of products, or products damaged by accident, misuse, abuse, fire, flood, improper installation, acts of God, neglect, corrosion, modification or mishandling.
 3. Products damaged by improperly loading beyond the specified maximum weight capacity outlined in the instructions provided with the product.
 4. Repairs or replacement when your product is used in other than normal, single-family household use, such as a commercial environment, or handled in any way inconsistent with the installation instructions included with the product.
 5. Cosmetic damage, including scratches, dings, dents or cracks in paint that do not affect the structural or functional capability of the product.
 6. Surfaces damaged due to chemical interaction resulting in corrosion of paint or metal.
 7. Replacement parts for NewAge products outside Canada and the United States.
 8. Replacement keys or locking mechanisms.
 9. Loss of product contents due to theft, fire, flood, accident or acts of God.
 10. Shipping or freight fees to deliver replacement products or to return defective products.
 11. Any labor costs during the limited warranty period.
-
-

DISCLAIMER OF IMPLIED WARRANTIES; LIMITATION OF REMEDIES

IMPLIED WARRANTIES, INCLUDING TO THE EXTENT APPLICABLE WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED TO THE EXTENT LEGALLY PERMISSIBLE. ANY IMPLIED WARRANTIES THAT MAY BE IMPOSED BY LAW ARE LIMITED TO ONE YEAR, OR THE SHORTEST PERIOD ALLOWED BY LAW. SOME STATES AND PROVINCES DO NOT ALLOW LIMITATIONS OR EXCLUSIONS ON HOW LONG AN IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS LASTS, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR PROVINCE TO PROVINCE