

Model NR66 Series Residential Tankless Water Heater Specification Sheet

- **Standard Input** - gas consumption ranges from 20,000 BTU/h to 140,000 BTU/h
- **Capacity Range** - flow rates from 0.5 gpm up to 6.6 gpm
- **Compact Design** - ANSI Z21.10.3/CSA 4.3 certified design that can be wall-mounted indoors (-SV model only) or installed outdoors with an -OD model
- **Durable Steel Casing with Polyester Coating**
- **Venting Options** - available in Power Vent (-SV) or Outdoor (-OD) model that requires 3" Category III stainless steel pipe
- **Direct Electronic Ignition**
- **Energy Factor** - 0.82 (NG) 0.84 (LP) for SV model
0.83 (NG) 0.84 (LP) for OD model
- **Thermal Efficiency** - 83% efficient for use with natural gas or propane
- **Temperature Controls** - includes 120°F (default), 130°F, or 140°F standard temperature settings*
- **Power Cord Installation Kit** - the SV model includes 6' power cord and provided wire connectors (*assembly required*)
- **Safety Devices** - Flame Sensor, Overheat Prevention Device, Lightning Protection Device, Freeze Protection
- **Additional Features** - Temperature Lockout, High Elevation Adjustment
- **12-Year** Limited Heat Exchanger Warranty for Residential Use**
- **5-Year Limited Parts Warranty**
- **1-Year Reasonable Labor**
- **Approvals** - CSA, UPC***, NSF, Low Nox Compliant with Jurisdictions Requiring <40 ng/j or 55ppm




<p>Model</p> <p>NR66 - _____</p> <p><input type="checkbox"/> SV (Standard Vent)</p> <p><input type="checkbox"/> OD (Outdoor Vent)</p> <p>Accessories</p> <p><input type="checkbox"/> Outdoor Vent Cap for SV Model (#VC-3)</p> <p><input type="checkbox"/> Remote Controller (#RC-7649M)</p> <p><input type="checkbox"/> Remote Controller Cord (#RC-CORD10)</p> <p><input type="checkbox"/> Pipe Cover (#PC-1S)</p> <p><input type="checkbox"/> Isolator Valves (#IK-WV-200-1)</p> <p><input type="checkbox"/> Recess Box for OD Model (#RB-500)</p>



* Optional remote thermostat can precisely adjust the output temperature from 100°F to 160°F in 5°F intervals
 ** 3-Year Heat Exchanger warranty if supplied with pre-heated or circulated water, refer to the Noritz Limited Warranty for complete coverage details
 *** This product complies with California AB 1953 Low Lead Law and Section 1417(d) of the Safe Drinking Water Act


Dimensions

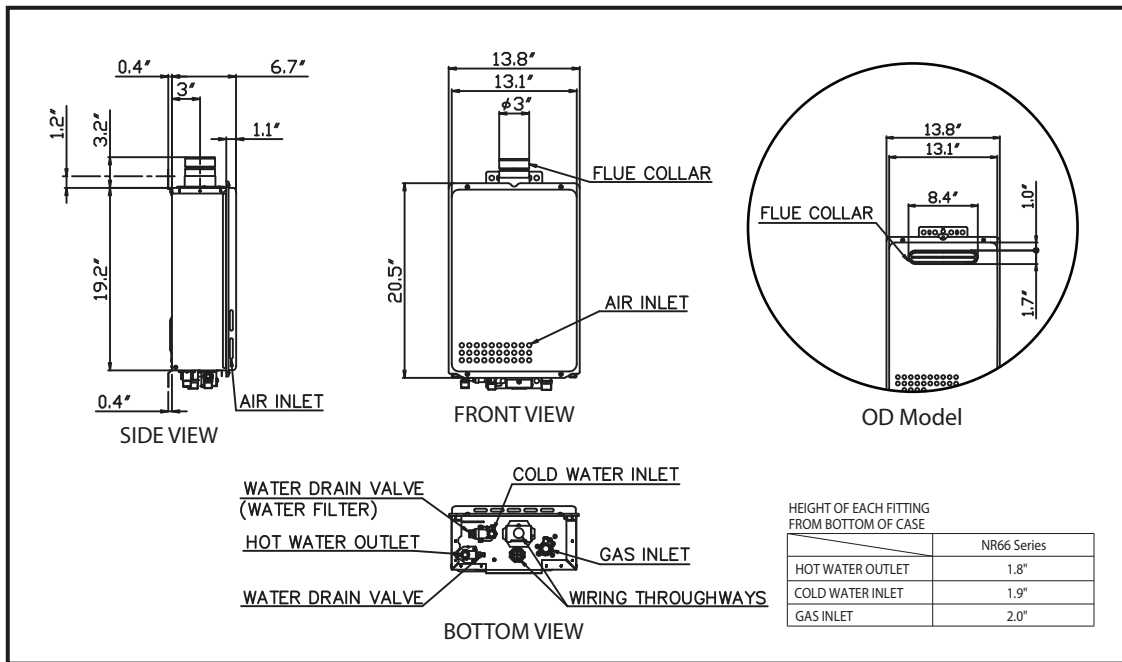

Flow Rates

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100
Flow Rate (GPM)	6.6	5.8	5.3	4.6	3.8	3.3	2.9	2.6	2.3

Pressure Loss

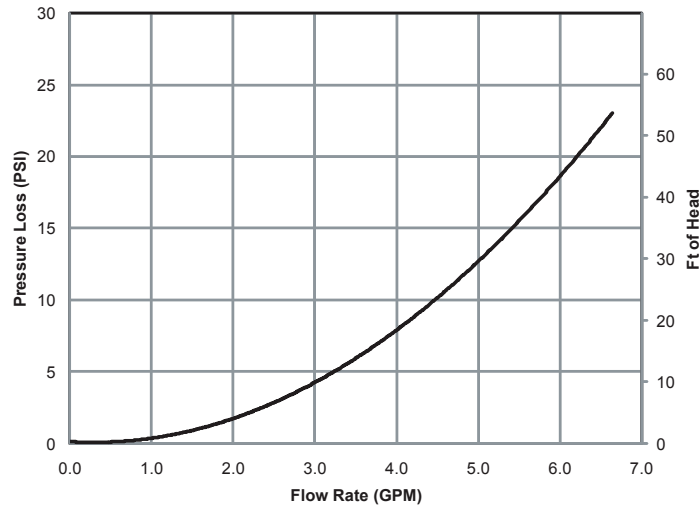

Specifications

Model Name	NR66-SV	NR66-OD	
Weight	36 (pounds)		
Water Holding Capacity	0.2 Gallon		
Connection Sizes	Water Inlet	3/4"	
	Hot Water Outlet	3/4"	
	Gas Inlet	3/4"	
Power	Supply	120VAC (60Hz), less than 2 amperes	
	Consumption	NG: 48W LP: 49W Freeze Prevention 141W	NG: 51W LP: 52W Freeze Prevention 141W
Freeze Prevention	Indoor: -30 Outdoor: -4°F	Outdoor: -4°F	
Temperature Settings	100-150°F (In 5°F intervals), 160°F(12 Options)		
Default Temperature Options	120, 130, 140°F (Default is 120°F)		