

CRYSTORAMA

1958

95 Cantiague Rock Road , Westbury NY 11590



ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com, www.crystorama.com

MODEL#: 5711-AB ASSEMBLY AND DRESSING INSTRUCTIONS



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

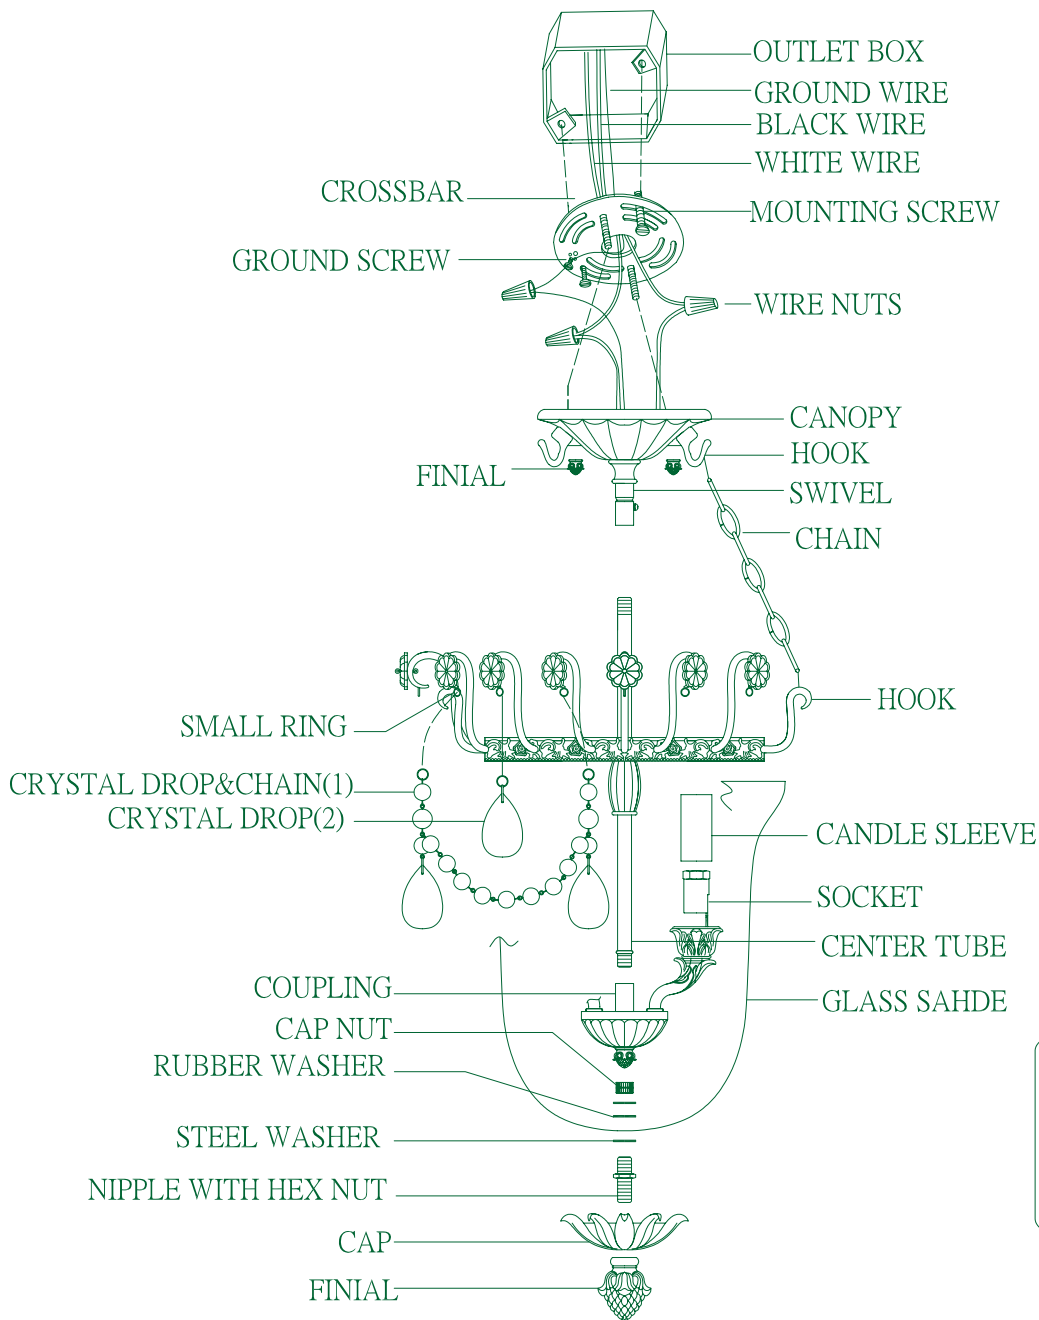

FIXTURE ASSEMBLY, MOUNTING, AND WIRING INSTRUCTIONS:

1. Carefully remove the fixture out of the carton and check that all parts are included, referring to the above illustration. Make sure that the electricity is turned off.
2. Thread 2 Mounting screws properly into the relevant mounting holes pre-drilled on the Cross bar;
3. Attach the Cross bar to outlet box using 2 Outlet box screws upwards;
4. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.
5. Tuck the wire connection neatly into the outlet box;
6. Attach the fixture body to the ceiling and let the 2 mounting screws protrude through the 2 pre-drilled keyholes on the Canopy, and fix it in place by finials;
7. Turn power on at fuse or circuit box.

When install the fixture :

1. Thread center tube into coupling and swivel;
2. Thread nipple with hex nut through steel washer, glass shade, rubber washer into cap nut, then slide the cap onto nipple with hex nut, and secure it with finial;
3. Install the chain onto hook&hook;
4. Put the candle sleeve onto socket;
5. Install the crystal drop & chain (1), crystal drop(2) onto small ring of the fixture body;
8. The fixture is ready for lamping and installation!