pendants





Weblink 100

Project page 262, 324, 336, 342, 354, 368, 372, 376

Design

Poul Henningsen

Concept

PH ke (1958) is a 360-degree glare free luminaire created by 72 leaves, which shield the light source, redirect and reflect the light onto the underlying leaves, giving distinct, unique illumination.

Copper or stainless steel, brushed and lacquered. White, wet painted.

Leaves: Die cut copper, laser cut stainless steel or die cut steel. Top shade: White, spun steel. Frame: High lustre chrome plated, laser cut steel. Suspension: High lustre chrome plated, spun aluminum.


Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'. Canopy: White. Cord type: 3-conductor, 18 AWG PVC power cord. Cord color: Copper version: Black cord or stainless steel and white version: white cord. Cord length: 12'.

Weight

Max. 55 lbs.

Label

cUL, Dry location. IBEW.



Product code	Dimension	Light source	Voltage	Finish
РНА	18.9" 23.6". 28.3" 33.1"	1/150W/CMH/T-6 G12 1/250W/MH/ED-28-0 mogul 1/400W/MH/ED-37 mogul 1/200W/A-23/CL medium 1/500W/PS-35/CL mogul	120/277V 120V	BR ST STEEL COP LAC WHT

Specification notes:

- a. 18.9" variant is available in 1/200W incandescent and CMH G12 light sources.
- b. CMH and MH variants provided with one remote mounted 120/277V F-can ballast.

- c. Incandescent variants only available in 120V.
 d. MH variants require an open rated lamp (by others)
 e. 1/400W/ED-37/MH mogul is not available in 23.6" or 18.9" diameter variants.
- f. 23.6", 28.3", 33.1" variants are only available in 1/500W incandescent.

Info notes:

- I. MH variants require an open rated lamp (by others).
- II. The comparable EU version has the following classification: Ingress Protection Code: IP20.












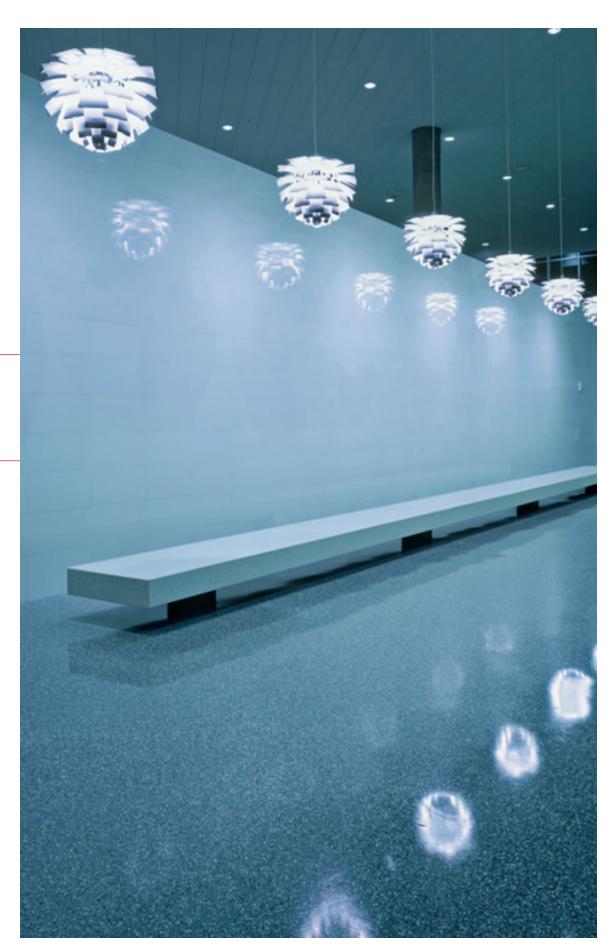

Tampa International Airport
Tampa, Florida, USA
Architect
Alfonso Architects, Inc.
Lighting Designer
Tilden Lobnitz Cooper
Photo
Terry Renna