


Assembly Instructions For


F2403/3 (E) 12/08

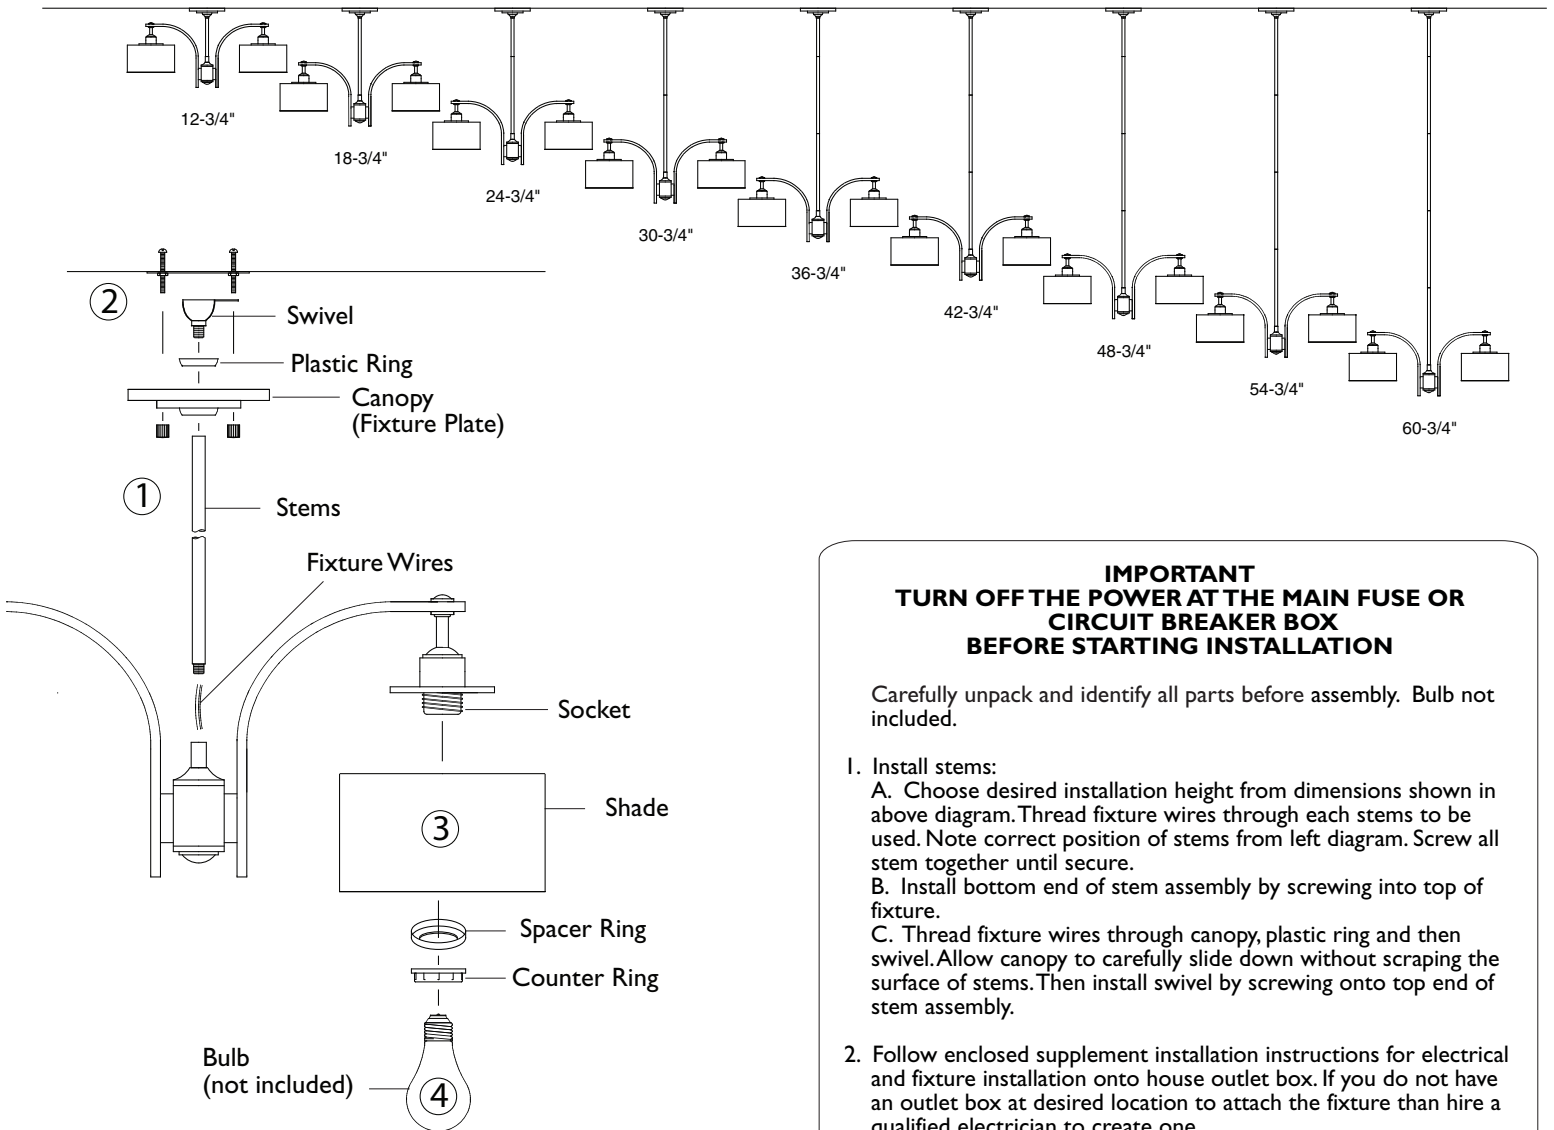

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Install stems:
 - A. Choose desired installation height from dimensions shown in above diagram. Thread fixture wires through each stems to be used. Note correct position of stems from left diagram. Screw all stem together until secure.
 - B. Install bottom end of stem assembly by screwing into top of fixture.
 - C. Thread fixture wires through canopy, plastic ring and then swivel. Allow canopy to carefully slide down without scraping the surface of stems. Then install swivel by screwing onto top end of stem assembly.
2. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
3. Install glass shade onto fitters by fastening with spacer ring (open side facing up) and counter ring onto threaded sockets.
4. Install bulb (not included). See relamping label located near socket area for type and maximum allowed wattage.



MURRAY
F E I S S
Generation Brands™