







Fixture Name: Pemberly Court 1089-5 RSB

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.


PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Canopy 1ea @5-1/2"X1-1/4" 	Wire Connectors 3ea P4 Orange 	Top Loop 1ea @3/8 x 65mm 	
Chain 1ea 6ft x4.2mm 	Junction Box Screw 2ea 8/32" x 1" 	Spring Washer 1ea @15 x 2mm 	
Chain Connector 2ea @4.2X50mm 	Canopy Loop with Collar 1ea @3/8 x 40mm x 5mm 	Nipple 1ea @3/8 x 55mm 	
Mounting Strap w/ ground screw 1ea 3/4"X4" 	Hex Nut 2ea/2ea @3/8 x 3mm/@3/8 x 5mm 	Top/Bottom Threaded Rod 1ea @3/8 x 45mm/@3/8 x 60mm 	
Arm Alignment Cup (top) 1ea @80 x 30mm 	Check ring 1ea @16 x 3mm 	Top Cap 1ea @85 x 25mm 	
Arm Alignment Cup (bottom) 1ea @94 x 20mm 	Finial 1ea @3/8 x 25mm 	Bottom Cap 1ea @100x45mm 	
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

- Gently spread the arms until evenly spaced if arms are packed closed.
- Feed the fixture wires through the Top threaded rod (N), Arm alignment cup (O), Hex nut (P), Top cap (Q), Check ring (R) and Top loop (J).
- Slide the Arm Alignment Cup (top) (O) and over the Top threaded rod (N) secure with Hex nut (P). The teeth will ensure proper arm spacing.

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

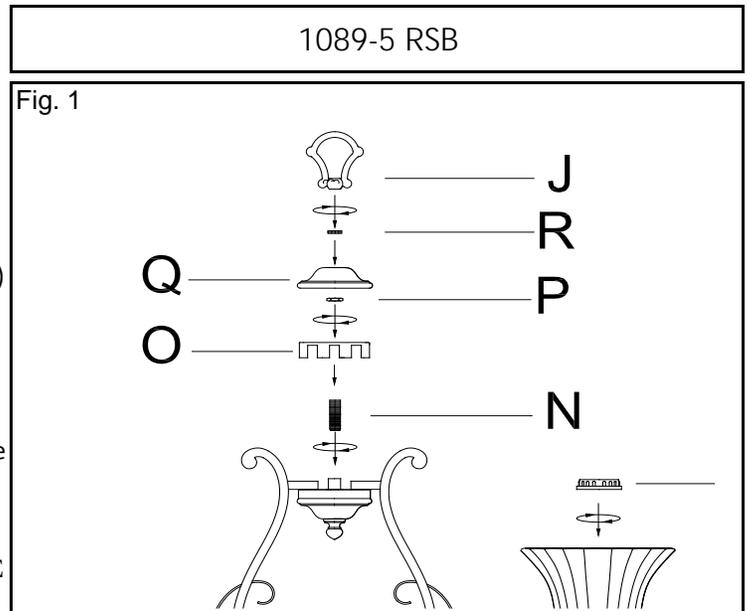

For Customer Service, contact the place of purchase to arrange for replacement parts.

PARTS & ASSEMBLY SHEET

Fixture Name: Pemberly Court 1089-5 RSB

4. Slide the Top cap (Q) over the Top threaded rod (N), secure in place with the check ring (R) until tight.

5. Then screw the Top Loop (J) to the threaded center column of Frame (M) until tight.

6. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (K) then remove the excess Chain (L) and discard it.

7. Use one chain connector (L) to attach one end of the chain to the Top loop (J) and close the chain connector.

8. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.

9. Slip Canopy loop collar (H) over the chain, then do the same with the canopy (G).

10. When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop (F) and close the chain connector.

11. Make sure the weight of the chandelier will be supported by the chain-not the electrical wire.

* You may now install the fixture. Note: Complete these remaining steps after the fixture is hung.


12. Turn the Bottom threaded rod (S) into the coupling at bottom center of the Frame (M).

13. Slide the Arm Alignment Cup (bottom) (T) over the bottom Threaded rod (S), secure in place with the hex nut (P) until tight. Slide the Bottom cap (U) over the Bottom threaded rod (S), secure in place with the Finial (V) until tight.

14. Slide the Glass Shade (W) over the socket of Frame (M) and secure Glass Shade (W) by threading the Socket Ring (X) onto socket of Frame (M) until tight.

15. Install the light bulbs in accordance with the fixture's specifications.
(DO NOT EXCEED MAXIMUM WATTAGE RATING)

Fig 2

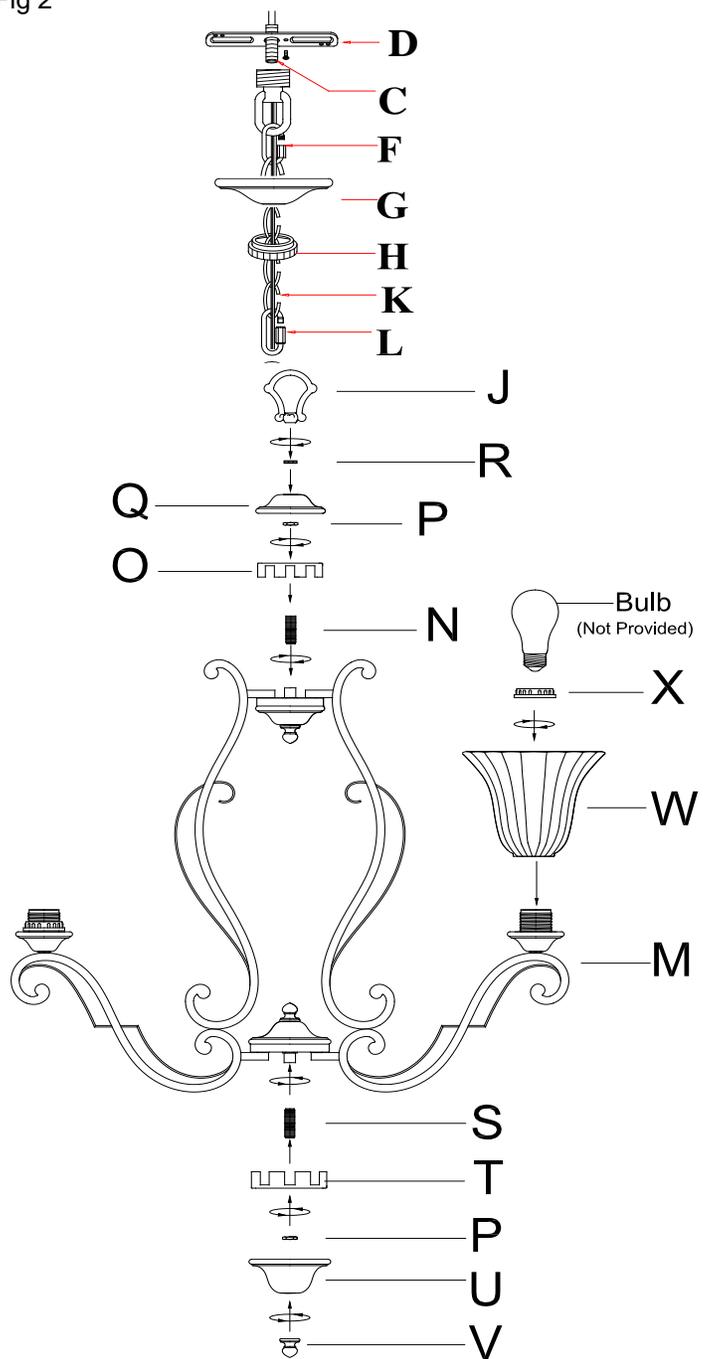

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

- Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
- Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
- Thread Nipple (C) into Canopy Loop (F) until snug.
- Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
- Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
- Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten screw securely with screw driver.
- Unscrew the Canopy loop collar (H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. *the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
- Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
- Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

CONNECTING THE WIRES (Fig. 2)

- Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 - Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
- Tuck these wire connections neatly into the Junction Box.
 - Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar (H) into the Canopy Loop (F).
 - Install the light bulbs and shade as per the fixture assembly sheet.

Fig. 1


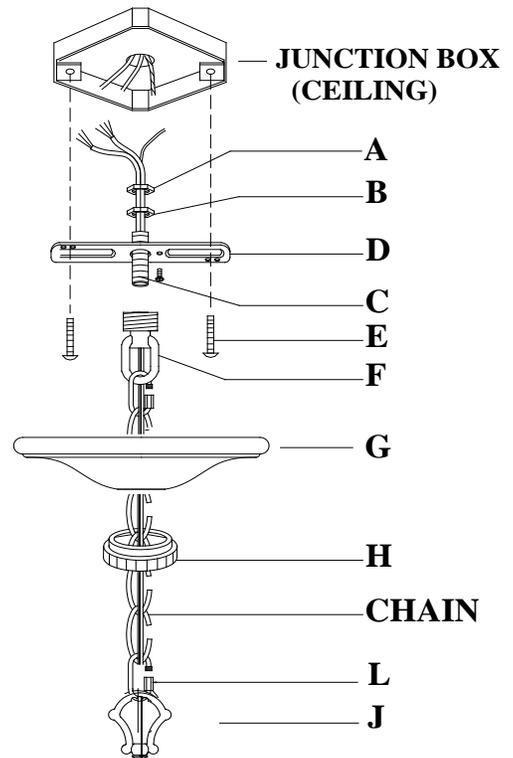


Fig. 2

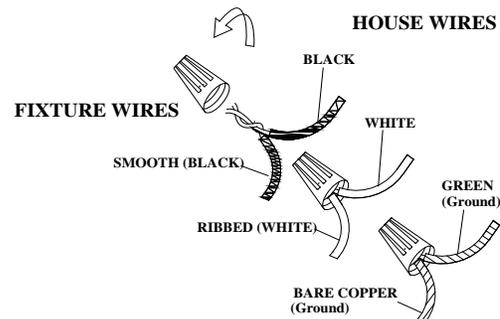

**YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX
AND TEST THE FIXTURE.**