

ASSEMBLY AND INSTALLATION INSTRUCTIONS

CC11816

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

For Semi-Flush


1. Attach two screws to the mounting strap, and secure with two lock nuts. (You can adjust the length of the screws if necessary.)
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Adjust the arms of the fixture according to the drawing of the package.

Important to know:

- a. The distance between the arms should be equally distanced.
 - b. The arms should be fixed securely.
4. Attach the metal ring with set screws to the arms. Adjust the arms to make the set screws thread through the holes in the arm, then secure them with bolt nuts.
 5. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the power source.
 - The white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 6. Attach the canopy to the mounting strap, and secure it with two bolt nuts.
 7. Attach nipple(-b) to the coupling of the socket base, and secure with a washer and hex nut. Adjust the length of nipple(-b) if necessary.
 8. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
 9. Attach the glass shade to the fixture by inserting nipple(-b), secure it with rubber pad, metal pad and hex nut. Then slide the cover up to the glass shade and secure with finial.
 10. Turn on the power at the main fuse or circuit breaker box.

For Pendant: (See Fig.1)

1. Remove contents of hardware package marked "For Pendant".
2. Attach nipple(-a) to the mounting strap, then secure it with a washer and hex nut.
3. Attach the mounting strap to the outlet box by using two mounting screws.
4. Secure the top loop to nipple(-a).
5. Follow steps 3~4 of instructions For Semi-Flush.
6. Secure the loop onto the stem of fixture canopy.
7. Choose a certain length of chain you need, then weave the fixture wire and the fixture grounding wire through the chain links. Spread one end link of chain to clamp securely to the loop.
8. Thread the fixture wire and fixture grounding wire through collar, canopy, top loop, nipple(-a) and mounting strap in order.
9. Clamp the other end link of chain to the top loop.
10. Follow step 5 of instructions For Semi-Flush.
11. Attach the canopy to the mounting strap by inserting the top loop, and secure it with the collar.
12. Follow steps 7~10 of instructions For Semi-Flush.

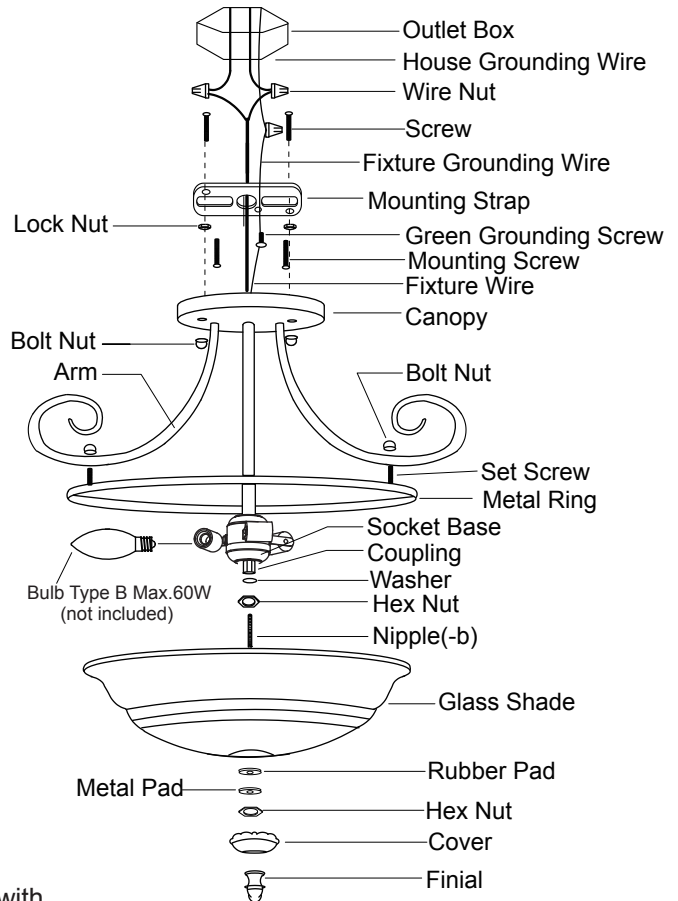

Mounting Parts For Pendant

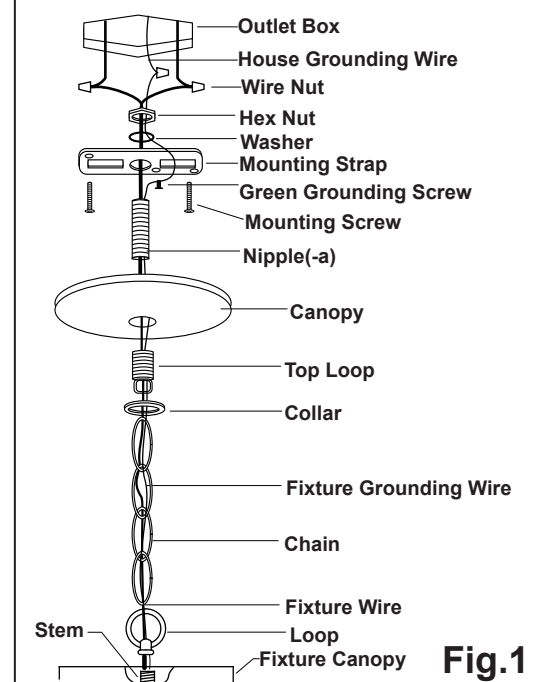


Fig.1