

# **MARGAUX**<sub>®</sub>

#### **Features**


- Brass construction
- MasterClean™ sprayface on showerhead resists mineral buildup
- · Available with cross handle or lever handle
- Push-button diverter [K-T16233 and K-T98759]
- Requires a Rite-Temp valve
- · Complements Margaux Suite

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016

BATH & SHOWER TRIM SET **K-T16233**ALSO K-T16234, K-T16235, K-T16246,



#### Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

### **Specified Model**

Model	Description	Colors/Finishes	
K-T16233-3	Bath and shower trim, with diverter – cross handle (shown)	□ CP	☐ Other
K-T16233-4	Bath and shower trim, with diverter – lever handle	□ CP	☐ Other
K-T16234-3	Shower trim only – cross handle	□ CP	☐ Other
K-T16234-4	Shower trim only – lever handle	□ CP	☐ Other
K-T16235-3	Valve trim only – cross handle	□ CP	☐ Other
K-T16235-4	Valve trim only – lever handle	□ CP	☐ Other
K-16246	Bath spout	□ CP	☐ Other
K-T98759-3	Valve trim only, with diverter – cross handle	□ CP	☐ Other
K-T98759-4	Valve trim only, with diverter – lever handle	□ CP	☐ Other

Required Accessories				
K-304-*	Rite-Temp <sub>®</sub> valve <b>OR</b>	□ NA		
K-2971-KS	HiFlow Rite-Temp valve with stops <b>OR</b>	□NA		

## **Product Specification**

The bath & shower trim set shall be made of brass construction. Faucet trim shall be available with a cross handle or a lever handle. Product shall feature a push-button diverter [K-T16233 and K-T98759]. Showerhead shall feature a MasterClean sprayface on showerhead which resists mineral buildup. Product requires a Rite-Temp valve. Product shall complement the Margaux Suite. Bath and shower trim shall be Kohler Model K-T\_\_\_\_\_\_ or K-\_\_\_\_\_ and Rite-Temp valving shall be K-\_\_\_\_-.\_\_\_\_.NA.

# **MARGAUX**<sub>®</sub>

Required Accessories (Continued)								
K-11748-K	Rite-Temp valve with diverter <b>OR</b>			□ NA				
K-11748-KS Rite-Temp valve with diverter and stops								
* For a complete listing of all the Rite-Temp valves, refer to the K-304-* Specification Sheet or Roughing-In Sheet.								
Optional Accessories								
88526	HiFlow Rite-Temp <sub>®</sub> thin wall installation kit	□ CP	☐ Other					

#### **Installation Notes**


Install this product according to the installation guide.

**NOTICE: Risk of product damage.** Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and wall-mount spout.

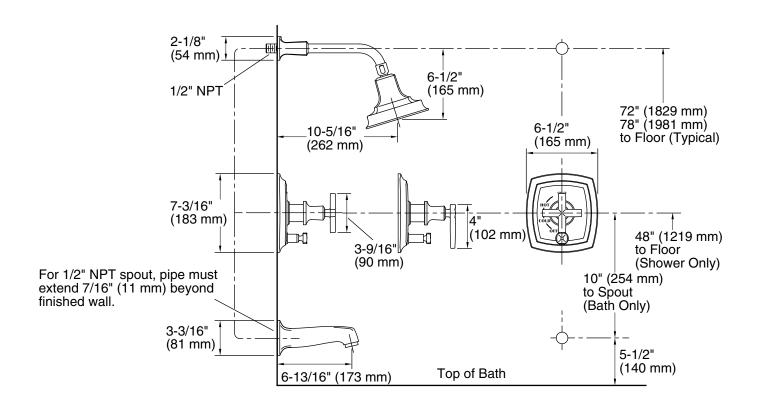

### **Product Diagram**

