# Eco Nexus® Close Coupled Toilet, 1.28GPF

#### **FEATURES**

- E-Max® flushing system, low consumption (1.28GPF/4.8LPF)
- Elongated skirted design
- Universal Height
- Decorative two-piece design with high-profile tank
- Chrome trip lever
- 12" Rough-in

#### **MODELS**

CST794EF

#### **COMPONENTS**

- CT794EF Elongated bowl
- ST794E Tank and cover only
- ST794ER#01
   Tank and cover only, right-hand trip lever
- SS204 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)
- SS304 SoftClose® maple seat (sold separately)

## **COLORS/FINISHES**

 Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige

#51 Ebony

### PRODUCT SPECIFICATION

The two-piece low consumption E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model CST794EF\_\_\_\_.





#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







## Eco Nexus® Close Coupled Toilet, 1.28GPF

#### **SPECIFICATIONS**

• Water Use 1.28 GPF/4.8LPF

Flush System E-Max®
 Min. Water Pressure 8 psi (static)
 Water Surface 10-1/4" x 8-1/4"

Trap Diameter 2-1/16"
 Rough-in 12"
 Trap Seal 2-1/4"

• Warranty One Year Limited Warranty

Material Vitreous china
Shipping Weight CT794EF - 62lbs
ST794E - 36.5lbs

Shipping Dimensions CT794EF

29-3/4"L x 16-1/2"W

x 24-3/4"H

ST794E


20-3/8"L x 8-3/8"W


x 19-5/8"H


#### **INSTALLATION NOTES**

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

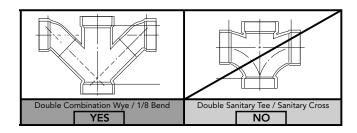

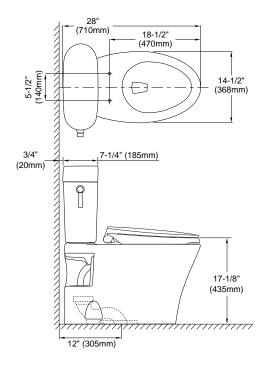



# TOTO:

These dimensions and specifications are subject to change without notice